

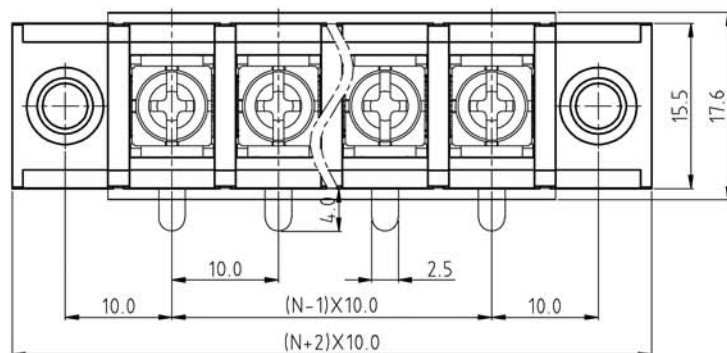
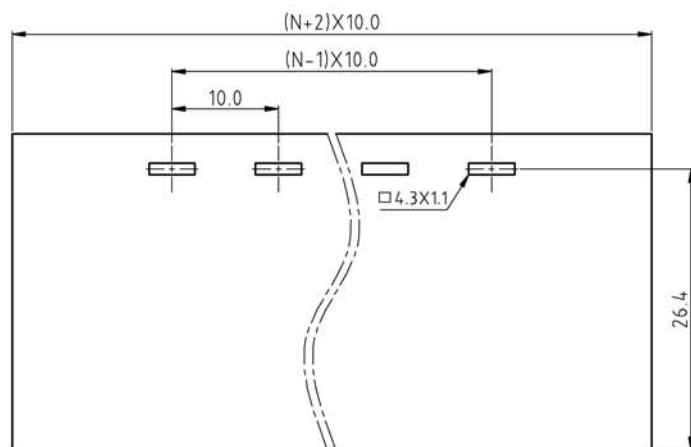


SIGN	DESCRIPTION	DATE	APPROVER
△	变更前品名U2609,变更后品名U2606	2015.10.30	YangMing



N=Number of contacts

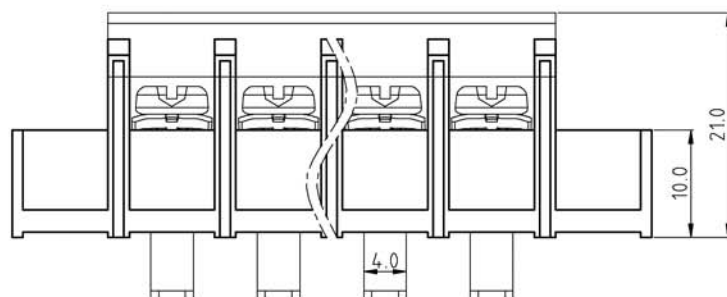

PCB. LAYOUT

Technical Data:

Material:

Contact Pin: Copper Alloy.Tin Plated

Terminal screw: Steel galvanized and with Cr3+ plated

Insulator: Polyamide(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 20 Amps/way max

Contact resistance: 20mΩ (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 12-22AWG

Mechanical:

Torque: 12kgf.cm/M3.5

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C /5 seconds max

Ordering Information:

△ U260-6-J-XX- X X X 0

2 02
4 04
28 28

A Black Pa66

B Black Pbt

1 With flange

2 Without flange

1 "-" Screw Plating Cr3+

2 "-/+" Screw Plating Cr3+

3 "-" Screw Plating Ni

4 "-/+" Screw Plating Ni

WELINK 上海拓尔普电子科技有限公司
Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	U260-6 Pitch 10.0mm
X.X ±0.30	DRAWN: Yang Ming 2015,10,30	-Series With flange
X.XX ±0.20	UNITS: mm	PART NO: U2606JXX21X0
X° ±1°	REV: B	DWG NO: 9U2606001B
SCALE: 2 / 1	PAGE: 1 / 1	